

## Feilen und Sägen

### Feilen und Sägen



FRF-4-1 F, FRF-4-2F




FRS-45



Typen- Bezeichnung	Werk- zeug- art	Höhe pro min.	Hub	Aufnahme	Länge	Gewicht	Luft- ver- brauch	Anschluß- Gewinde	Min. Ø Schlauch
			mm	mm	mm				
FRF-4-1F	Feile	1600	12,0	4,0x 13,0x 20	208	0,8	0,28	1/4	6,0
FRF-4-2F	Säge	1600	12,0	2,0x 13,0x 20	212	0,8	0,28	1/4	6,0
● FRS-45	Säge	1200	45,0	2,5x 17,7x 31	419	2,9	0,40	1/4	9,5

- Lieferung im Aufbewahrungskasten

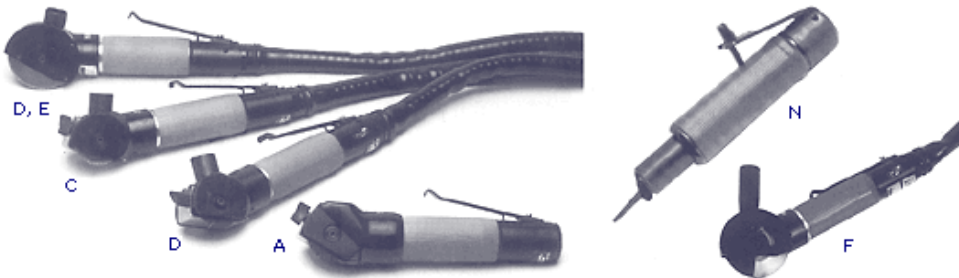

	A PS -10B	B PS -10BD	C PS -10XD	D PS -25XD	E PS -25DS	F PS -25HS	N SRV -110
Drehzahl Free running speed min <sup>-1</sup> Varvtal	3000	3000	18000	3000	3000	3000	165 Hz
Leistung Power Effekt	W	350	350	350	350	350	
Luftverbrauch Air consumption Luftförbrukning	l/s	7.5	7.5	7.5	7.5	7.5	1.5
Gewicht Weight Vikt	kg	1.4	1.4	1.4	1.4	1.5	1.15
Schnitttiefe Depth of cut Skärdjup	mm	10	10	10	25	25	
Geräuschpegel Sound level Ljudnivå	dB(A)	80	80	80	80	80	78

Vibrationspegel / Vibration level / Vibrationsnivå < 2,5m/s<sup>2</sup>