


# GRINDERS

**BAHCO**  
DORTMUND

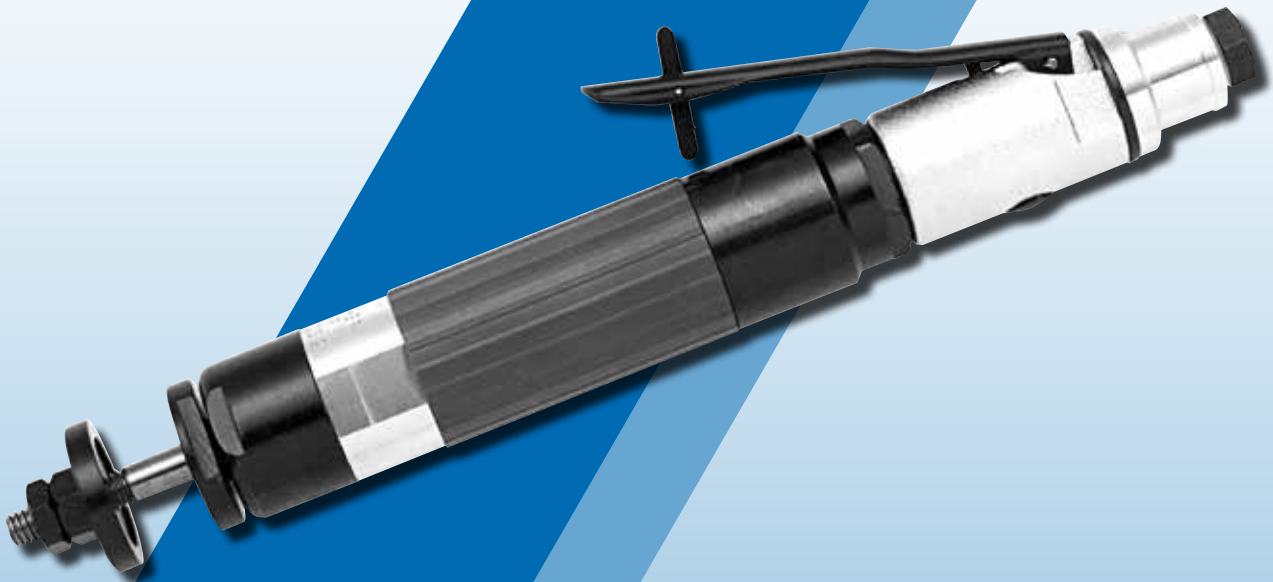

**PNEUMATIC GRINDER  
SERIES FG  
SLOW ROTATING**

# BAHCO

**BAHCO GmbH & Co.KG**

Martener Hellweg 60

DE- 44379 Dortmund

**Phone**

+49 231/91 72 11-0

**Fax**

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

This powerful grinder have a reduction gear and a speed controller to comply with the performance and speed setting.

It's light weight and compact design make it ideal for polishing, grinding and Lackent remote and they can be used with non-woven fabric, brushes, flap discs and buffing.



FG-3VX-1F



FG-3VX-3F

**Technical data**

Type	Collet size mm	Idle speed rpm	Spindle thread size inch	Capacity kW	Total length mm	Weight kgs	Max. air consumption m <sup>3</sup> /min	Compressed air con. BSP o. NPT	Hose width mm / inch	
<b>Version with exhaust back</b>										
FG-2VX-1F	6	4300	3/8 - 24UNF	0.29	216	0.9	0.34	1/4	9.5	3/8
FG-3VX-1F	6	7600	W 3/8 - 16	0.28	331	1.4	0.45	1/4	9.5	3/8
FG-3VX-6F	6	12000	W 3/8 - 16	0.31	331	1.4	0.47	1/4	9.5	3/8

Type	Max. Ø grinding wheel mm	Idle speed rpm	Spindle thread size inch	Capacity kW	Total length mm	Weight (w. disc protect.) kgs	Max. air consumption m <sup>3</sup> /min	Compressed air con. BSP o. NPT	Hose width mm / inch	
<b>Version with exhaust back</b>										
•FG-3VX-2F	75 x 19 x 9.5	9500	W 3/8 - 16	0.29	316	•1.4	0.47	1/4	9.5	3/8
•FG-3VX-3F	125 x 19 x 9.5	7600	W 3/8 - 16	0.28	316	•1.4	0.45	1/4	9.5	3/8

\* Models with • are without disk protection.

• FG-3VX incl. supply and exhaust hose.

Compressed air connection: 1/4 " BSP.

All information subject to change without further notice.  
No responsibility is taken for the correctness of the named specifications.