


FG

BAHCO
DORTMUND

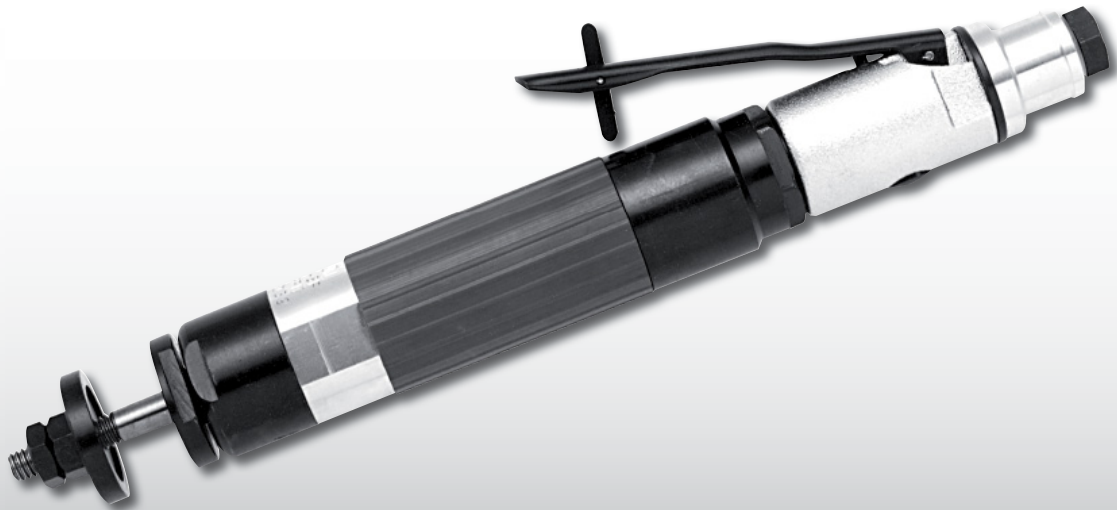

SLOW ROTATING GRINDER SERIES FG

This powerful grinder has a reduction gear and a speed controller to comply with the performance and speed setting.

Its light weight and compact design make it ideal for polishing, grinding and Lackent remote and they can be used with non-woven fabric, brushes, flap discs and buffing.

BAHCO

BAHCO GmbH & Co.KG

Martener Hellweg 60

DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de



FG-3VX-1F



FG-3VX-3F

Technical Data

Type	Collet size	Idle speed	Spindle thread size	Capacity	Total length	Weight	Max. air consumption	Compressed air con.	Hose width
	mm	rpm	inch	kW	mm	kgs	m ³ /min	BSP o. NPT	mm / inch

Version with exhaust back

FG-2VX-1F	6	4300	3/8" - 24UNF	0,29	216	0,9	0,34	1/4"	9,5	3/8"
FG-3VX-1F	6	7600	W 3/8" - 16	0,28	331	1,4	0,45	1/4"	9,5	3/8"
FG-3VX-6F	6	12000	W 3/8" - 16	0,31	331	1,4	0,47	1/4"	9,5	3/8"

Type	Max. Ø grinding wheel	Idle speed	Spindle thread size	Capacity	Total length	Weight (w. disc protect.)	Max. air consumption	Compressed air con.	Hose width
	mm	rpm	inch	kW	mm	kgs	m ³ /min	BSP o. NPT	mm / inch

Version with exhaust back

•FG-3VX-2F	75 x 19 x 9,5	9500	W 3/8" - 16	0,29	316	•1,4	0,47	1/4"	9,5	3/8"
•FG-3VX-3F	125 x 19 x 9,5	7600	W 3/8" - 16	0,28	316	•1,4	0,45	1/4"	9,5	3/8"

* Models with • are without disk protection.

• FG-3VX incl. supply and exhaust hose.

Compressed air connection: 1/4" BSP.