

BATTERY SCREW TECHNOLOGY

BAHCO
DORTMUND




**TORQUE WRENCH
BATTERY TYPE
B-RAD SELECT BL**

BAHCO


The battery torque wrench series B-RAD-SELECT can be set digitally by values of 10Nm. The B-RAD SELECT is also available with a two-stage automatic and ideally suited for most applications. Its advantages are the slim and short design and in its ease of use. Furthermore these tools can be used for valve actuations.

Each torque wrench comes fully calibrated in a storage case and includes reaction arm, backup battery and quick battery charger.

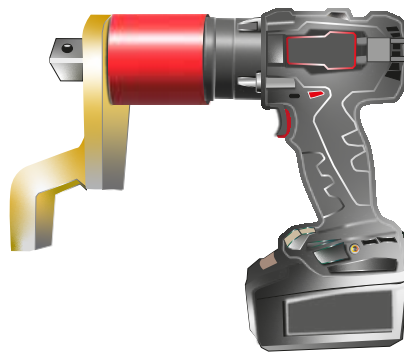

FEATURES

- Torque controlled shut-off
- Repeatability $\pm 5.0\%$
- Digital torque setting by the value of 10Nm
- Slim and short design
- Clockwise/anticlockwise rotation
- Lithium-ion 18V/5.2Ah battery technology (7.0Ah optional)
- Standard tool or tool with 2-speed automatic
- Screw position lighting optionally

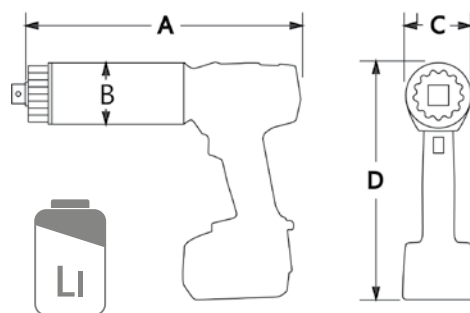

LIEFERUMFANG

- Battery powered torque wrench B-RAD SELECT BL
- Reaction arm with locking ring
- 2 pieces of Li-Ion batteries with 5.2Ah / 18V
- Charger
- Factory test certificate
- Operation manual
- Tool case

B-RAD SELECT BL



OPTIONS

- Screw point lighting
- Li-HD battery 8.0Ah
- Modification to the MAD series

ACCESSORIES

ADDITIONAL HANDLE	TOOL SUSPENSION	OFFSET-GEAR
SPECIAL REACTION ARM	TWO-HAND OPERATION	EXTENSION

DIMENSIONS

Type	Square drive	Torque [Nm]		Speed [min ⁻¹]	Weight [kg]	Dimensions [mm]			
		min.	max.			A	B	C	D
B-RAD 275 SELECT BL	½" & ¾"	50	270	47	3.2	228	63	67	262
B-RAD 700 SELECT BL	¾"	150	700	21	3.5	231	63	67	262
B-RAD 1400 SELECT BL	¾"	300	1400	10	3.5	231	63	67	262
B-RAD 1400-2 SELECT BL	¾"	300	1400	71	4.3	279	63	67	262
B-RAD 2000 SELECT BL	1"	400	2000	6	4.0	244	69	69	262
B-RAD 2000-2 SELECT BL	1"	400	2000	19	4.9	298	69	69	262
B-RAD 4000 SELECT BL	1" & 1½"	815	4000	3	6.0	285	81	81	268
B-RAD 4000-2 SELECT BL	1" & 1½"	815	4000	19	6.7	337	81	81	268
B-RAD 7000 SELECT BL	1½"	1400	7000	2	8.8	295	95	95	275

BAHCO
DORTMUND

BAHCO GmbH & Co.KG

Martener Hellweg 60

DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.