

ACCESSORIES COMPRESSED AIR

BAHCO
DORTMUND




**HOSE REELS OPEN OR
CLOSED - SWIVELING**

BAHCO

HOSE REELS WITH STEEL CASE & SWIVELING


Hose reel complete with wall bracket with bayonet hooks
and joint with 1/4" AG at the hose outlet

Type	relative flow rate l/min.	Length hose Air/water m	Length Connection hose m	Hose- Ø mm	Connection Inlet Outlet	max. Work. pressure bar
89010	280	11	1,5	8 x 12	MPT 1/4" G	20

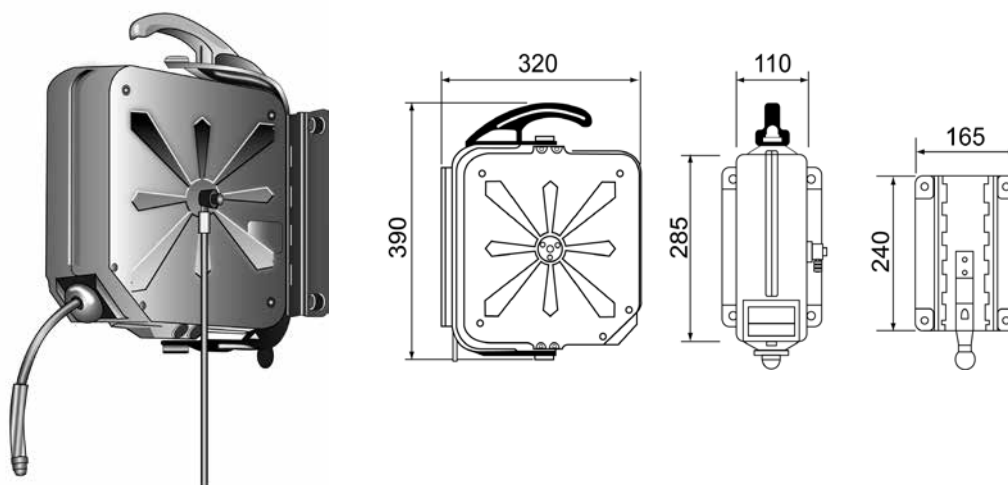

HOSE REELS WITH STEEL CASE • SWIVELING & FIXED

Type	relative flow rate l/min.	Hose length m	Connection hose m	Hose- Ø mm	Connection Inlet	Connection Outlet	max. working pressure bar
83107	760	15	0,6	13	NPT 1/2" G	MPT 1/2" G	18
83110	690	12	0,6	9,5	NPT 1/2" G	MPT 3/8" G	18
83111	640	18	0,6	9,5	NPT 1/2" G	MPT 3/8" G	18

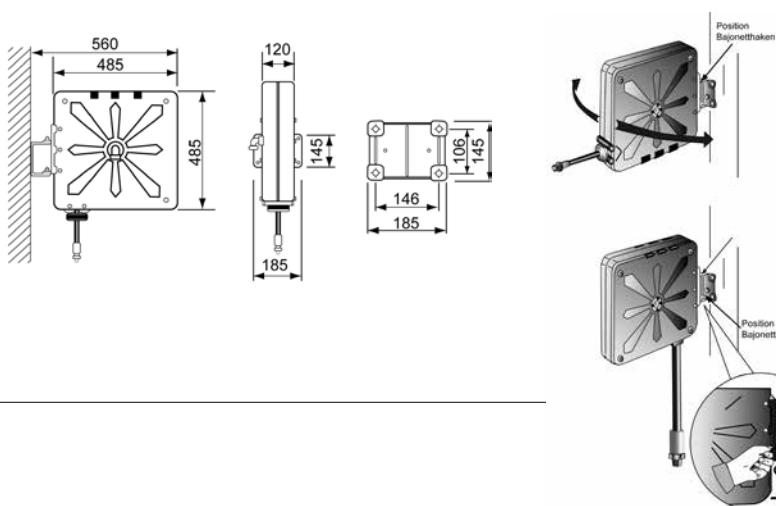

Swiveling

With this fixing, the hose can freely rotating up to 55° to the right and left side (only for wall mounting).

Fixed mounting

The hose can be blocked in a central position with two screws, included.

HOSE REELS WITH PLASTIC CASE & SWIVELING

BAHCO
DORTMUND

The pneumatic hose rules are equipped with a high-quality oil-resistant polyurethane hose and with a supply hose as standard accessory. The series is available in various housing sizes and hose dimensions as well as spark-resistant hose.

Compressed air	Part-No.	Hose length m	Hose Ø mm	Connection (AG)	Housing HxTxB mm	Weight kgs	max. work press. bar
	19 911 2020	7	8 x 12	R 1/4"	313x342x190	4,5	16
	19 911 2022	10	8 x 12	R 1/4"	313x342x190	4,9	16
	19 911 2140	10	11,0 x 16,0	R 1/2"	409x426x190	6,7	12
	19 911 2130	14	9,5 x 13,5	R 3/8"	409x426x190	6,5	16
	19 911 2120	17	8 x 12	R 1/4"	409x426x190	6,6	16
	Anti-spark-hose						
	19 911 2132	14	9,5 x 13,5	R 3/8"	409x426x190	6,5	12

Technical data

hose size (ID x OD) 8 x 12 • 9,5 x 13,5 • 11 x 16

Hose PUR with fabric


Length supply hose 1.5m

Temperature range -20°C bis +60°C

Swivel range 180°

19 911 2140


19 911 2130/32

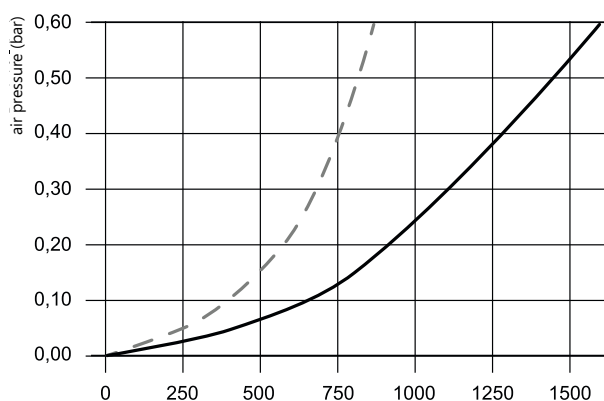

19 911 2120

19 911 2022

19 911 2020

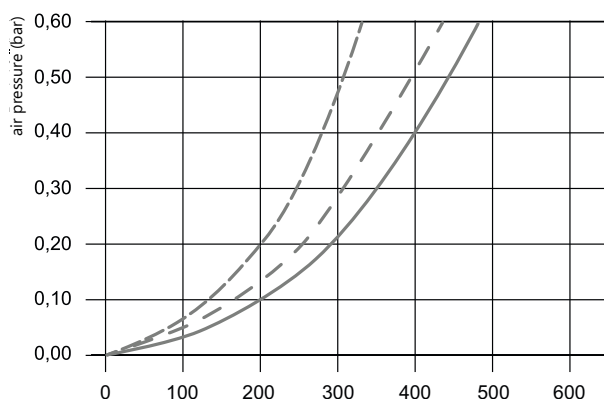

Technical details:

Operating pressure 20 bar, available in special versions for higher pressures;
for rigid, hinged mounting on the wall or 270° rotating from the ceiling of


Part-No.	Hose-length m	ID mm	Working pressure bar	Connection thread D	Feed E	Dim. A mm	Dim. B mm	Dim. C mm	Weight kg
BT 3056	5	6	20	G 1/4" a	G 3/8" i	180	200	150	3,5
BT 3126	12	6	20	G 1/4" a	G 3/8" i	300	360	190	8,5
BT 3156	15	6	20	G 1/4" a	G 3/8" i	340	375	190	10,5
BT 3206	20	6	20	G 1/4" a	G 3/8" i	340	375	190	11,5
BT 3089	8	9	20	G 3/8" a	G 3/8" i	300	360	190	7,5
BT 3129	12	9	20	G 3/8" a	G 3/8" i	340	375	190	11,0
BT 3159	15	9	20	G 3/8" a	G 3/8" i	340	375	190	11,0

Optional accessories:

W-plate for swiveling wall mounting - Art.Nr. : BZ 040

D-plate for ceiling mounting - Art.Nr. : BZ 190

Available with hose reel guide

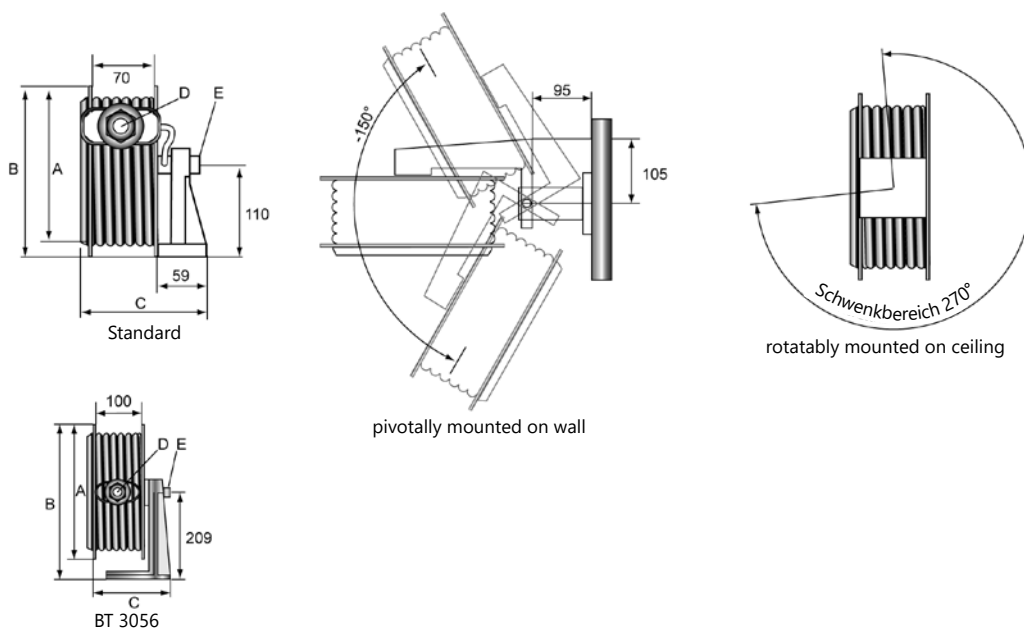

HOSE REELS SERIES BT 4000

Technical details:

Operating pressure 20 bar, with specially manufactured oil and petrol resistant PVC hose; rigid attachment for floor, wall or ceiling mounting; open or closed construction depending on the location or operational requirements; incl. hose reel guide.


Part-No.	Hose-length m	ID mm	Dimensions mm								Weight kgs
			A	B	C	D	E	F	G	H - Ø	
BT 4086-A	8	6	265	140	160	335	325	115	30	8,5	10,5
BT 4086-B			240			315	300				8,5
BT 4126-A	12	6	300	140	160	375	360	115	30	8,5	12,0
BT 4126-B			280			355	340				10,0
BT 4206-A	20	6	310	160	190	400	395	140	45	11	18,5
BT 4206-B							400				16,5
BT 4089-A	8	9	300	140	160	370	365	115	30	8,5	12,0
BT 4089-B				280		355	340				9,0
BT 4129-A	12	9	310	160	190	400	400	140	45	11	16,5
BT 4129-B						400					14,5
BT 4209-A	20	9	375	160	190	455	450	150	45	11	21,5
BT 4209-B						445					20,0

Optional accessories:

W-plate for swiveling wall mounting. On demand!

Connecting thread of media feed for all types G $\frac{3}{8}$ „male“;

Connection thread on the hose at NW6 = G $\frac{1}{4}$ „male“, with NW9 = $\frac{3}{8}$ “ male.

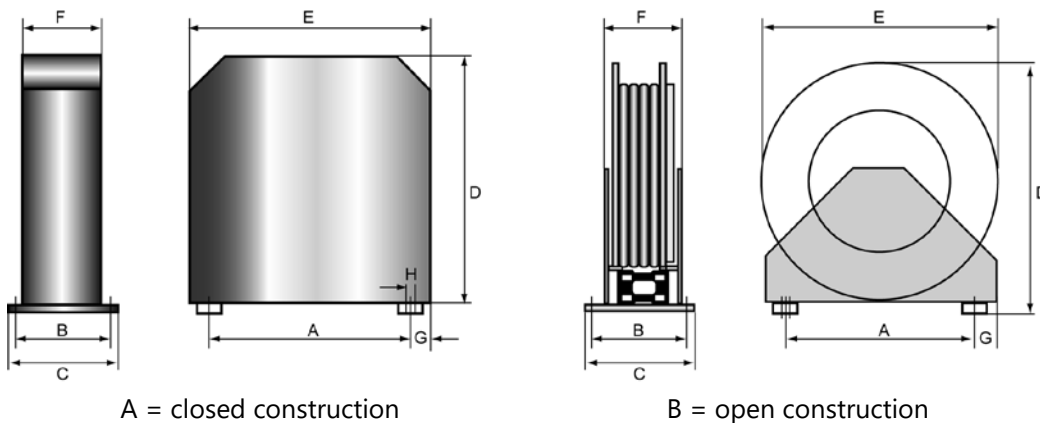

Other versions and reels with larger sizes on request!



BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.