


ELEKTROSCHRAUBER **BAHCO** DORTMUND

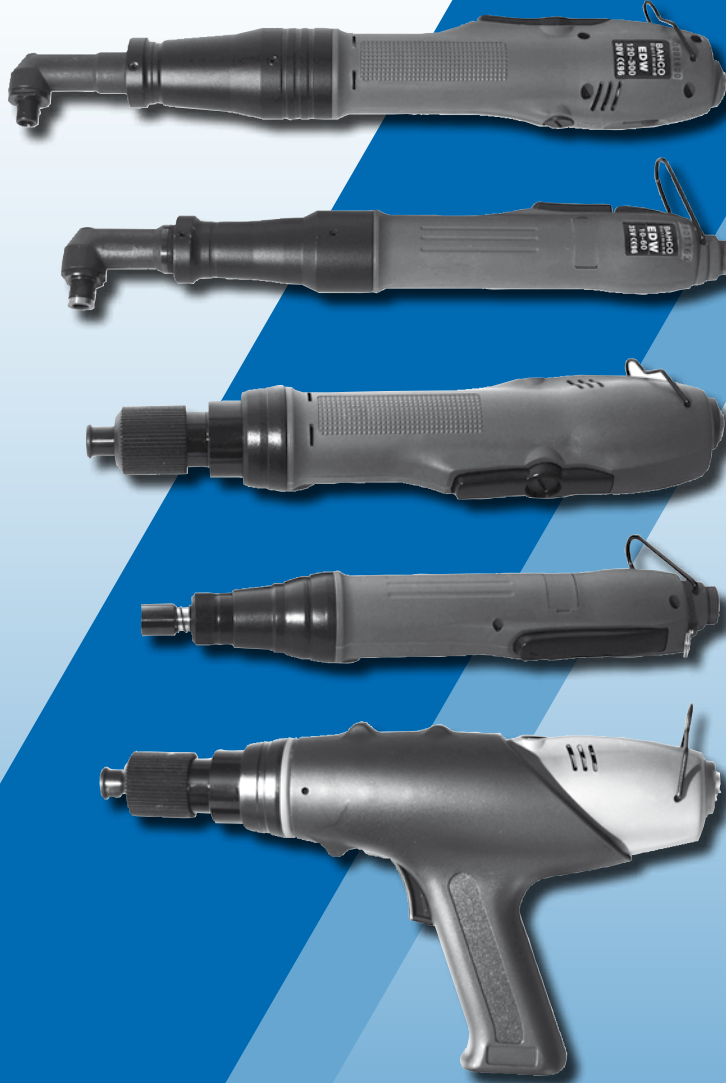

**ELECTRIC SCREWDRIVERS -
WITH BRUSHES DC 30V/35V**

BAHCO

This user-friendly screwdrivers work with low-voltage technology (30V resp.35V) and are operated by an AC power supply.

Their functionality is characterized by the high-precision shut-off clutch and the associated torque repeatability.

The torques can be set steplessly from the outside of the screwdriver.

The screwdrivers have a low noise level and are of lightweight construction.

At the side of the power supply is a reverse potentiometer, which allows you to change the speed (within the respective screwdriver speed).

Screwdrivers straight

Type	Torque (Nm)	Idle speed (min-1)	Srew size Ø mm	Weight (g)	Length (mm)	Output voltage V DC	Noise level dB (A)
EDG 4-15	0.04 - 0.15	520/720	1.5 ~ 2	310	204	35	66
EDG 10-60	0.1 - 0.6	520/720	2 ~ 3	310	204	35	66
EDG 15-95	0.15 - 0.95	520/720	2 ~ 3	310	204	35	66
EDG 70-200	0.7 - 2	500/750	3 ~ 4.5	650	257	30	68
EDG 120-300	1.2 - 3	320/550	3 ~ 5	650	257	30	68

Angle head Screwdrivers with bit head


EDW 4-15	0.04 - 0.15	520/720	1.5 ~ 2	600	287	35	66
EDW 10-60	0.1 - 0.6	520/720	2 ~ 3	600	287	35	66
EDW 15-95	0.15 - 0.95	520/720	2 ~ 3	600	287	35	66
EDW 70-200	0.7 - 2	500/750	3 ~ 4.5	900	340	30	68
EDW 120-300	1.2 - 3	320/550	3 ~ 5	900	340	30	68

Screwdrivers with mounted pistol grip

EDP 70-200	0.7 - 2	500/750	3 ~ 4.5	800	257	30	68
EDP 120-300	1.2 - 3	320/550	3 ~ 5	800	257	30	68

Addition : O - without power supply

Technical drawing

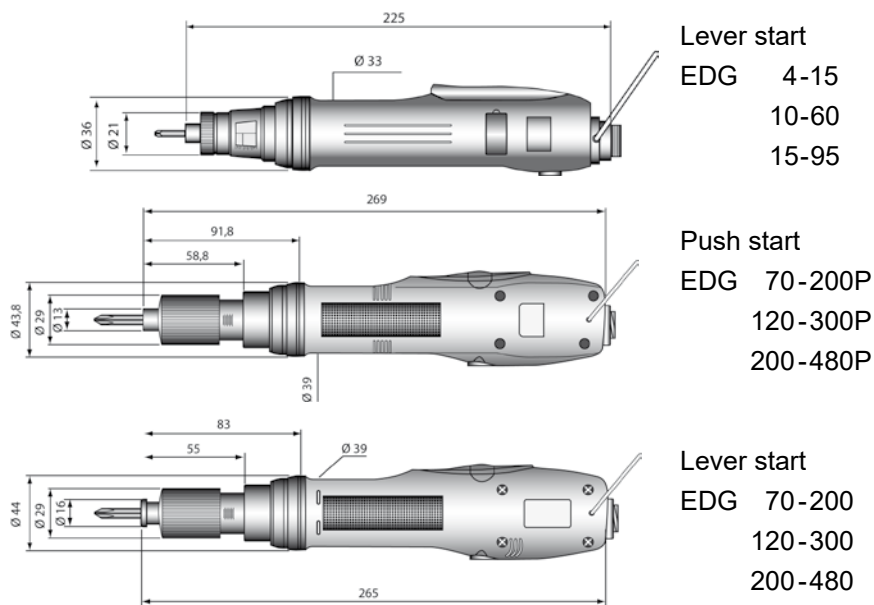

Power supply

Type	Input voltage (AC) V	Output voltage (DC) V	No. of screw connections	Dimensions LxHxB	Weight (kgs)	Switchable for Type
APS-351C	230	25/35	1	150x65x40	0,4	ED.. 4-15,10-60,15-95
APT-301B	230	30	1	152x85x40	0,5	ED.. 70-200,120-300





BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO