


PA-SERIES

BAHCO
DORTMUND

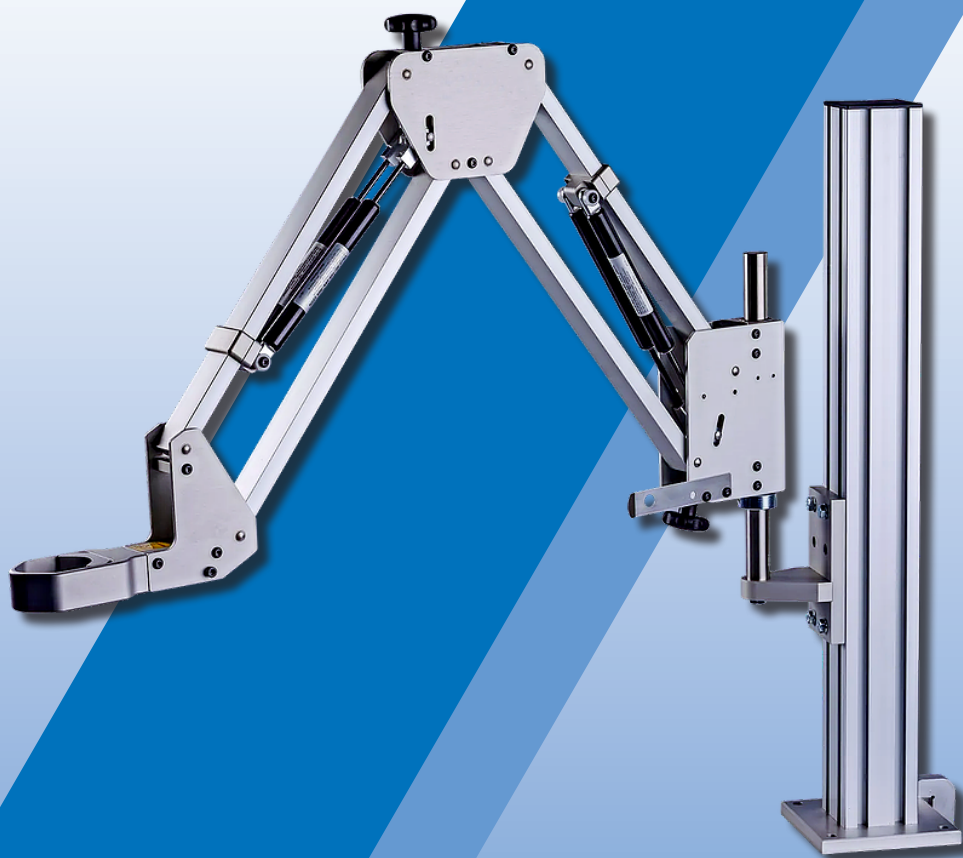

**PARALLEL ARM
SERIES PA-75**

BAHCO

The **PA-75** is a powerful and very smooth-running parallel arm, specifically developed for larger models of screwdrivers and tapping machines.

The integrated gas springs perfectly balance the tool's weight up to 10 kg and effortlessly absorb torques up to 75 Nm.

- *Torque capacity:* max. 75 Nm
- *Weight compensation:* up to 10 kg
- *Balanced:* with gas springs
- *Range of application:* powerful yet flexible for vertical work

Technical drawing



Technical data

Type	Load capacity	Torque	Reach		Height
			Max.	Min.	
	kg	Nm	mm		
PA-75-0400-0102	1 - 2	75	950	500	550
PA-75-0400-0203	2 - 3	75	950	500	550
PA-75-0400-0304	3 - 4	75	950	500	550
PA-75-0400-0405	4 - 5	75	950	500	550
PA-75-0400-0506	5 - 6	75	950	500	550
PA-75-0400-0608	6 - 8	75	950	500	550
PA-75-0400-0810	8 - 10	75	950	500	550
PA-75-0500-0102	1 - 2	75	1100	600	650
PA-75-0500-0203	2 - 3	75	1100	600	650
PA-75-0500-0304	3 - 4	75	1100	600	650
PA-75-0500-0405	4 - 5	75	1100	600	650
PA-75-0500-0506	5 - 6	75	1100	600	650
PA-75-0500-0608	6 - 8	75	1100	600	650
PA-75-0500-0810	8 - 10	75	1100	600	650

Accessories



Adjustable vertical bracket

Weight 0.4 kg
Torque ≤ 50 Nm
ATH-4050-75 ($\varnothing=40-50$ mm)
ATH-5060-75 ($\varnothing=50-60$ mm)



Fixed vertical bracket

Weight 0.7 kg
Torque ≤ 150 Nm
VTF-F-060 ($\varnothing=60$ mm)*
*Sleeve can be ordered in any dimension



Swivel vertical bracket

Weight 1.5 kg
Torque ≤ 150 Nm
VTH-S-060 ($\varnothing=60$ mm)*
*Sleeve can be ordered in any dimension



Table mounting

Torque ≤ 50 Nm
TST-0510-75




Wall bracket

Torque ≤ 50 Nm
WBR-75-E



Wall bracket (double)

Torque ≤ 150 Nm
WBR-75-D

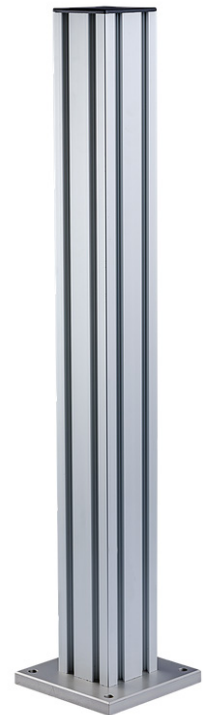

Pillar

BST-080x080x0800 h=750 mm
BST-080x080x1300 h=1300 mm



BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.