


PR-SERIES

BAHCO
DORTMUND

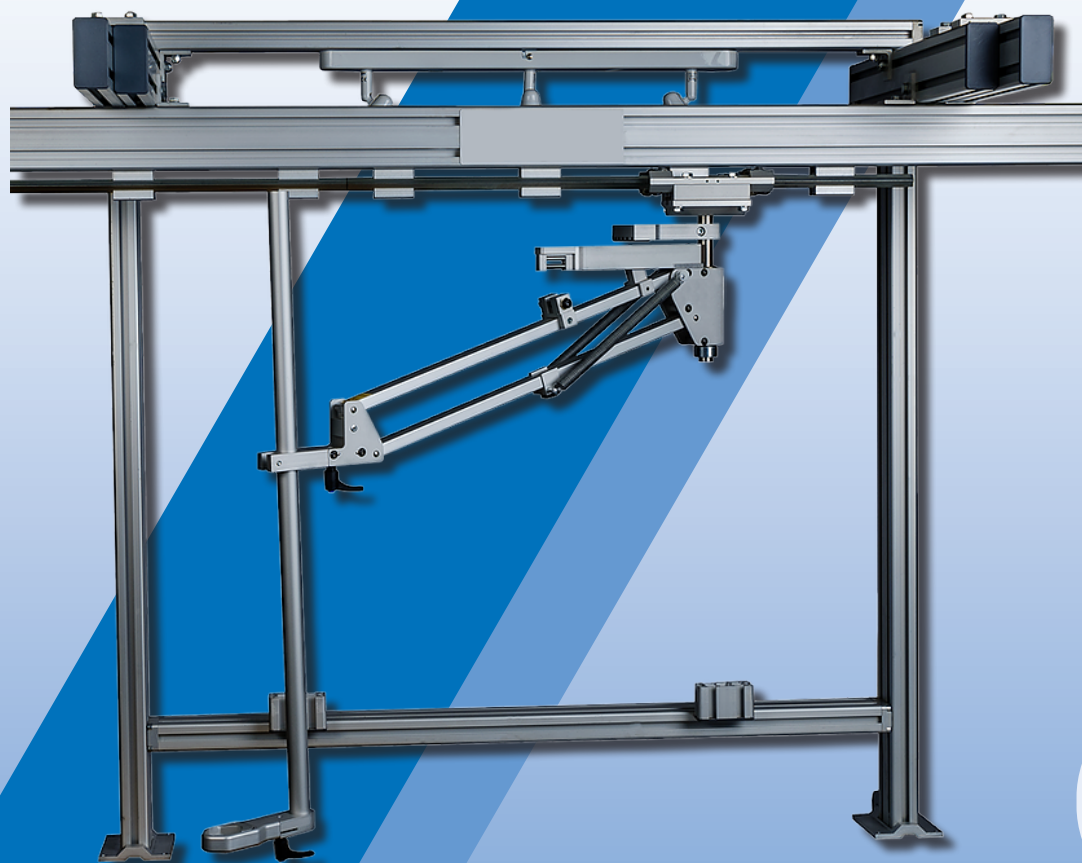

**RAIL SUPPORTED ARM
SERIES PR-25**


BAHCO

The **PR-25 rail supported arm** is a highly flexible design. The clever construction of the rail-guided arm ensures excellent accessibility.

Combined with a wide range of useful accessories, the PR-25 can be used for a variety of different assembly stations. The arm is made of high-quality aluminum and is perfectly balanced by robust coil springs.

- *Torque capacity:* up to 25 Nm
- *Weight compensation:* from 0 to 2.5 kg
- *Range of application:* high flexibility and large working area due to extensive accessories
- *Mounting:* table, wall, or ceiling mounting (or floor mounting via extension pipe)

Technical drawing

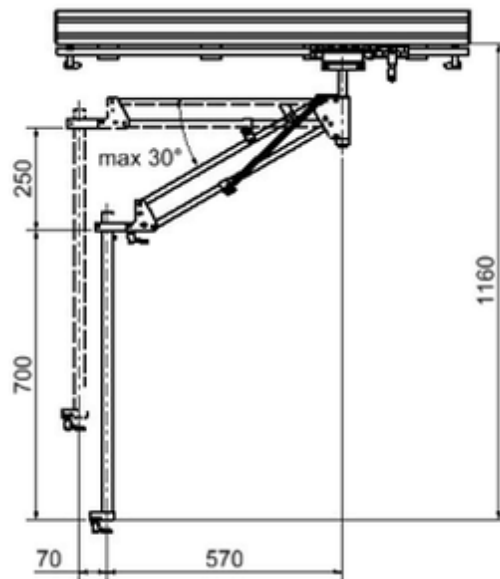

Technical data


Type	Load capacity	Torque	Max. Reach
	kg	Nm	mm
PR-25-0500-0025	0 - 2.5	25	+/- 450

Accessories




Adjustable vertical bracket

Weight 0.2 kg
ATH-2540-25 (Ø=25-40 mm)
ATH-4050-25 (Ø=40-50 mm)

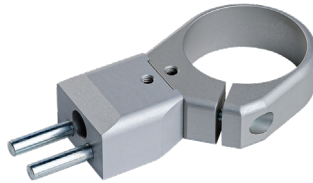


Fixed vertical bracket

Weight 0.2 kg
VTH-0036-25 (Ø=36 mm)
VTH-0038-25 (Ø=38 mm)
VTH-0046-25 (Ø=46 mm)
VTH-0056-25 (Ø=56 mm)

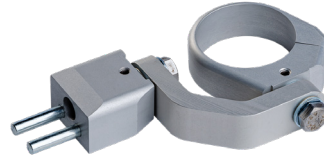

Swivel vertical bracket

Weight 0.2 kg
STH-0036-25 (Ø=36 mm)
STH-0038-25 (Ø=38 mm)
STH-0046-25 (Ø=46 mm)
STH-0056-25 (Ø=56 mm)

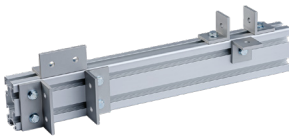

Aluminum crossmember

OSB-080x040x0500



Aluminum rail

BRL-3412



Aluminum profile

SBE-080x040




Pillar

BST-080x040x1300 h=1300 mm



Extension tube

Weight 0.5 kg
TEX-25



Cable trolley

TRO-8040



End stop

EST-3434



Cover

ECO-8040



Height stop

TAR-PR-25



Mounting kit

AKI-MC6S06x40



Side stop

SAR-PR-25



BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.