


ACCESSORIES COMPRESSED AIR


BAHCO
DORTMUND



**COMPRESSED AIR HOSES
MADE OF PVC, POLYURE-
THANE AND RUBBER**

BAHCO

PVC - Hoses	Type	Roll length	Dimension Inside - outside
	PVC 6 - 12, white	50 m	6 x 12 mm
	PVC 9 - 15, white	50 m	9 x 15 mm
	PVC 10 - 17, blue	50 m	10 x 17 mm
	PVC 13 - 21, blue	50 m	13 x 21 mm
	PVC 16 - 25, white	50 m	16 x 25 mm

Polyurethane - Hoses	Type	Roll length	Dimension Inside - outside
	PURG 65 - 10, blue	10, 25, 50, 100 m	6.5 x 10.0 mm
	PURG 80 - 12, blue	10, 25, 50, 100 m	8.0 x 12.0 mm
	PURG 95 - 135, blue	50, 100 m	9.5 x 13.5 mm
	PURG 110 - 16, blue	10, 25, 50, 100 m	11.0 x 16.0 mm
	PURG 130 - 18, blue	50 m	13.0 x 18.0 mm

Rubber - Hoses	Type	Roll length	Dimension Inside - outside
	GUM 6 - 13, black	40 m	6 x 13 mm
	GUM 9 - 16, black	40 m	9 x 16 mm
	GUM 10 - 15.5, black	50 m	10 x 15.5 mm
	GUM 10 - 17, black	40 m	10 x 17 mm
	GUM 13 - 21, black	40 m	13 x 21 mm
	GUM 15 - 27, black	40 m	15 x 27 mm
	GUM 16 - 26, black	50 m	16 x 26 mm
	GUM 19 - 31, black	40 m	19 x 31 mm
	GUM 25 - 39, black	40 m	25 x 39 mm

Other hoses or dimensions on request!

POLYURETHAN- SPRIRAL HOSES

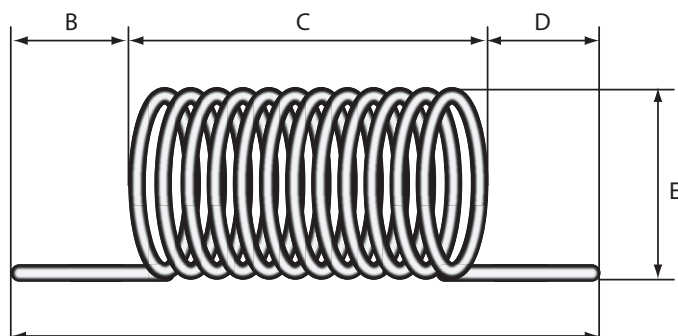
BAHCO
DORTMUND

Work length	Part-No.	Size ID x OD mm	A mm	B mm	C mm	D mm	E mm
 2 meter	19 958 5820	5 x 8	740	500	140	100	42
	19 958 6020	6.5 x 10	740	500	140	100	52
	19 958 6220	8 x 12	740	500	140	100	65
	19 958 6620	11 x 16	720	500	120	100	95
 4 meter	19 958 5840	5 x 8	930	500	330	100	42
	19 958 6040	6.5 x 10 *	930	500	330	100	52
	19 958 6240	8 x 12 *	920	500	320	100	65
	19 958 6640	11 x 16	880	500	280	100	95
 6 meter	19 958 5860	5 x 8	1120	500	520	100	42
	19 958 6060	6.5 x 10 *	1120	500	520	100	52
	19 958 6260	8 x 12 *	1100	500	500	100	65
	19 958 6660	11 x 16	1040	500	440	100	95
 8 meter	19 958 5880	5 x 8	1300	500	700	100	42
	19 958 6080	6.5 x 10	1310	500	710	100	52
	19 958 6280	8 x 12	1280	500	680	100	65
	19 958 6680	11 x 16	1210	500	610	100	95

* Dimension „B“ in 2000 mm length available on request.

Technical data

Size (ID x OD mm): 5 x 8 • 6.5 x 10 • 8 x 12 • 11 x 16
 Max. work. pressure: 10 bar (20° C)
 Min. Bursting pressure: 25 bar (20° C)
 Material: Ester based polyurethane





BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231 / 91 72 11-0

Fax

+49 231 / 91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.