

800 BAR

BAHCO
DORTMUND



STAINLESS STEEL PUSH CYLINDER SERIES CRB

13 TONS UP TO 100 TONS

BAHCO



BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22


www.bahco.de

info@bahco.de

Technical drawing



Fig. similar

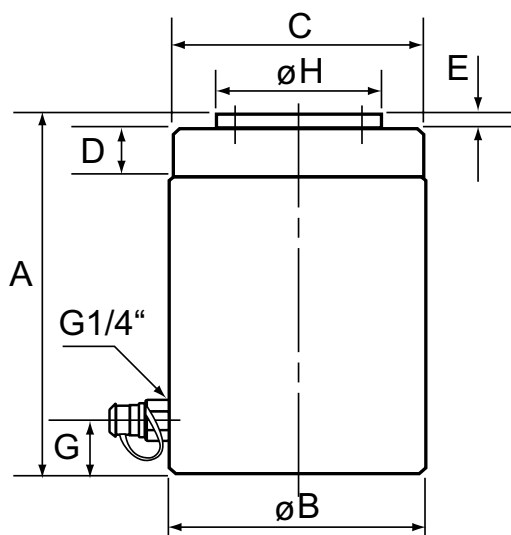

• Connection nipple TX23 not included. Please order separately.

Dimensions

Type	Work.- press. MPa	Capa- city t/kN	Stro- ke- length mm	Oil- vol. cm ³	Piston area cm ²	Length A mm	Dia- meter B mm	C mm	D mm	E mm	F Hand.	G mm	H mm	Weight kg
CRB 13-50	80	13/127	50	80	15,9	134	58	M58x2	25	6	–	20	38	2,3
CRB 13-100	80	13/127	100	159	15,9	184	58	M58x2	25	6	–	20	38	3,0
CRB 13-150	80	13/127	150	238	15,9	234	58	M58x2	25	6	–	20	38	3,7
CRB 25-25	80	25,4/249	25	78	31,2	115	80	M80x3	30	7	–	20	55	3,7
CRB 25-50	80	25,4/249	50	156	31,2	140	80	M80x3	30	7	–	20	55	4,4
CRB 25-100	80	25,4/249	100	312	31,2	190	80	M80x3	30	7	–	20	55	5,9
CRB 25-150	80	25,4/249	150	468	31,2	240	80	M80x3	30	7	–	20	55	7,3
CRB 25-200	80	25,4/249	200	624	31,2	290	80	M80x3	30	7	–	20	55	8,7
CRB 40A-50	80	41/402	50	251	50,3	146	105	M105x3	25	7	1	20	70	8,5
CRB 40A-100	80	41/402	100	502	50,3	196	105	M105x3	25	7	1	20	70	11,0
CRB 40A-200	80	41/402	200	1005	50,3	296	105	M105x3	25	7	1	20	70	15,6
CRB 63A-50	80	64/628	50	393	78,5	160	130	M130x3	25	7	1	32	80	14,0
CRB 63A-100	80	64/628	100	785	78,5	210	130	M130x3	25	7	1	32	80	17,7
CRB 63A-200	80	64/628	200	1571	78,5	310	130	M130x3	25	7	2	32	80	24,9
CRB 100A-50	80	100/982	50	614	122,7	183	160	M160x3	30	9	2	35	100	23,7
CRB 100A-100	80	100/982	100	1227	122,7	233	160	M160x3	30	9	2	35	100	28,9
CRB 100A-200	80	100/982	200	2454	122,7	333	160	M160x3	30	9	2	35	100	39,3

Connection thread G1/4"

• Mechanical locking for CRB-Series see Hydraulic accessories.

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.