


HYDRAULIC HIGH PERFORMANCE PUMP

BAHCO
DORTMUND

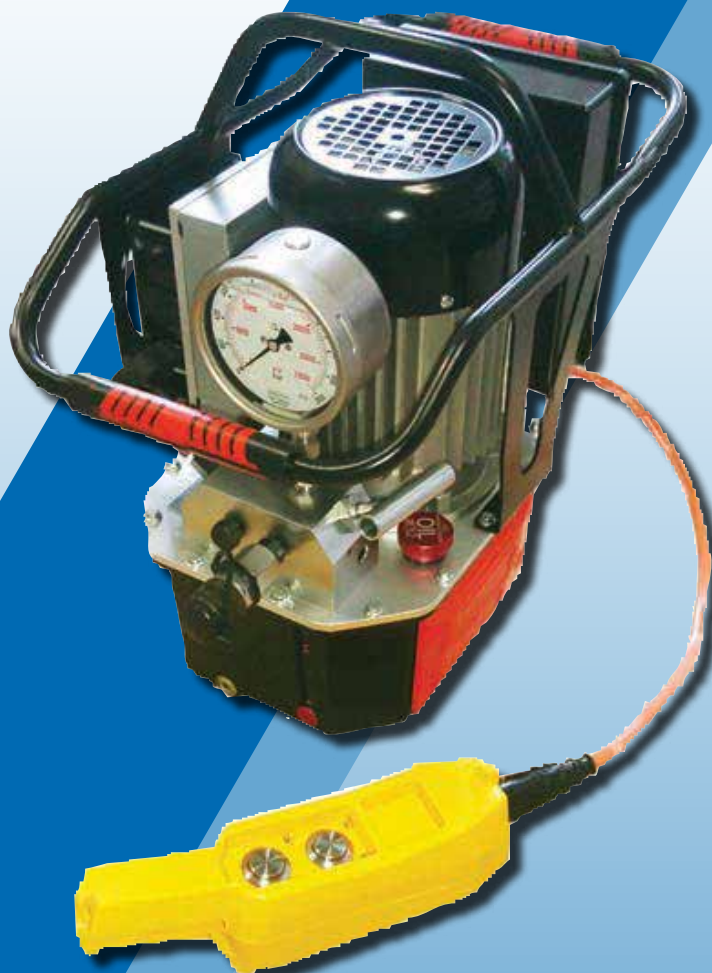

**ELECTRIC PUMP
HEM 15 / HEM 20
FOR TENSIONERS**

BAHCO

HEM 15 / HEM 20


HIGH PERFORMANCE PUMP

The electric power pump series **HEM 15 / HEM 20** works fast and reliable in two stages. The pressure can be set at the pressure gauge continuously. Due to the integrated oil cooler the pump can operate permanently.

Furthermore the pump design 120V enable the worldwide operation of **HEM 15 / HEM 20**. This hydraulic pump is suitable for hydraulic torque tensioners.

FEATURES

- Two-stage hydraulic unit with electric drive for hydraulic tensoning cylinders
- Stepless pressure adjustment
- Precision gauge (1500bar / 2000 bar - class 1.0)
- Incl. oil cooler
- Support and protection bracket made of steel
- For mains voltage 230V, 50Hz



HEM 15 / HEM 20 HIGH PERFORMANCE PUMP

OPTIONS

- Version with operating pressure 3000 bar
- Version with pneumatic drive
- Other cable lengths on request

SCOPE OF DELIVERY

- Hydraulic unit HEM 15 / HEM 20 with oil filling
- Operation manual

ACCESSORIES


PROTECTED HOUSING



MULTI DEVICE CONNECTION



SYMBOLIC



TECHNICAL DATA

Type	Flow rate	Working pressure	Capacity	Volume	Weight	Dimensions [mm]		
	[l/min]	[bar]	[kW]	[l]	[kgs]	A	B	C
HEM 15-110-3	High pressure: 0.3 Low pressure: 4.2	1500	1.1	3	28.3	300	450	430
HEM 20-110-3	High pressure: 0.3 Low pressure: 4.2	2000	1.1	3	28.3	300	450	430

EXPLANATION OF THE SYMBOLS



Battery-operated



Rotation angle function



Electrically powered



Data transfer to the PC



Compressed air powered



Bluetooth connectivity



Oil operated



Sensor control



ATEX certification (optional)

BAHCO
DORTMUND

BAHCO GmbH & Co.KG

Martener Hellweg 60

DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.