

ACCESSORIES

BAHCO
DORTMUND



**MECHANICAL
LOCKING TCRB**
FOR CYLINDER SERIES CRB

BAHCO

Heavy lifting requires safety. A lifted load must be locked against dropping during work. BAHCO's mechanical lockings are designed to replace the commonly used, time-consuming and dangerous practice of manual subconstruction of a lifted load. These lockings are available for BAHCO cylinders of CRB series with capacities from 13 up to 100 t and stroke lengths up to 200 mm. These accessories can be the mechanical lockings easily mounted on the respective cylinder.

You're handling with a complete unit for combined lifting and safe locking. After mounting the locking on the cylinder, the piston is pumped up and the locking ring is screwed up to the pressure head. The load is now locked and independent of the connected hydraulics. The hydraulics can be switched off and the extended piston is protected against dirt.


Technical data

Type	Order-No.	for Cylinder	Weight	incl. Handle
			kg	
TCRB 13 - 1	40321350	CRB 13 - 50	1.0	–
TCRB 13 - 2	40321310	CRB 13 - 100	1.4	–
TCRB 13 - 3	40321315	CRB 13 - 150	1.8	–
TCRB 25 - 1	40322525	CRB 25 - 25	1.6	–
TCRB 25 - 2	40322550	CRB 25 - 50	1.9	–
TCRB 25 - 3	40322510	CRB 25 - 100	2.6	–
TCRB 25 - 4	40322515	CRB 25 - 150	3.3	–
TCRB 25 - 5	40322520	CRB 25 - 200	4.0	–
TCRB 40 - 1	40324050	CRB 40 - 50	5.0	YES
TCRB 40 - 2	40324010	CRB 40 - 100	6.4	YES
TCRB 40 - 3	40324020	CRB 40 - 200	7.8	YES
TCRB 63 - 1	40326350	CRB 63 - 50	7.5	YES
TCRB 63 - 2	40326310	CRB 63 - 100	9.2	YES
TCRB 63 - 3	40326320	CRB 63 - 200	13.0	YES
TCRB 100 - 1	40321150	CRB 100 - 50	11.3	YES
TCRB 100 - 2	40321110	CRB 100 - 100	13.5	YES
TCRB 100 - 3	40321120	CRB 100 - 200	17.6	YES



- 17 models
- Easy construction
- Fully galvanized design
- Models from 40 tn are supplied with handles (also act as a screwing aid)

Technical drawing

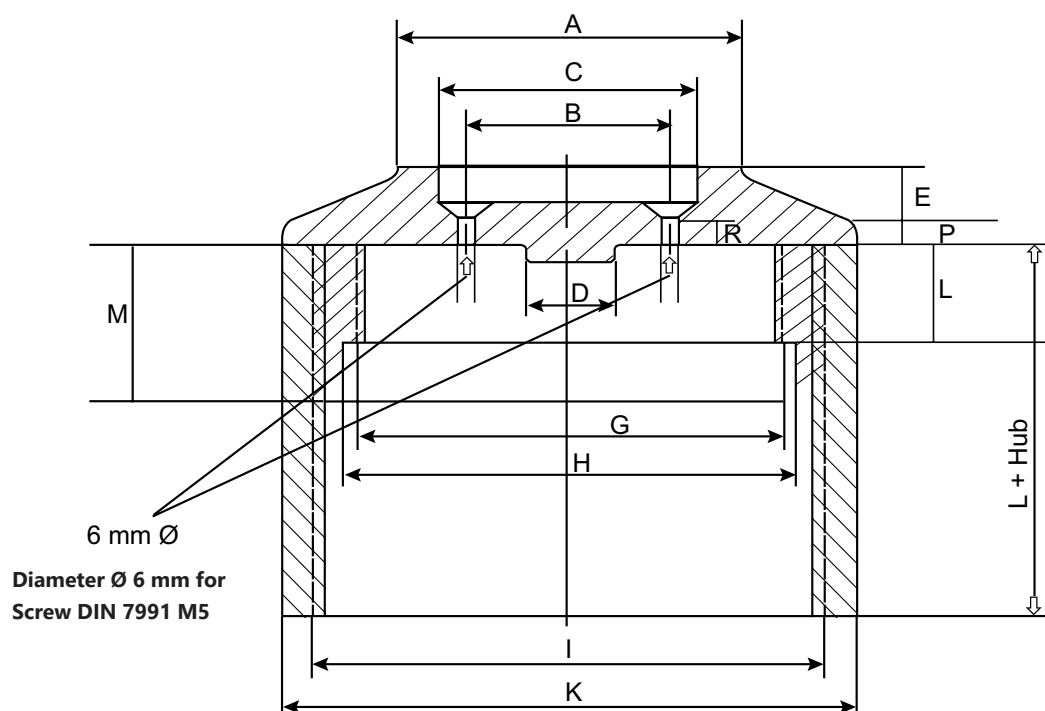

Dimensions

Type	A Ø	B	C Ø	D Ø	E	G
	mm					
TCRB 13	38	24	XXX	14	16,0	M 58 x 2
TCRB 25	55	34	XXX	17	21,5	M 80 x 3
TCRB 40	70	35	46	17	26,0	M105 x 3
TCRB 63	80	52	60	17	30,0	M 30 x 3
TCRB 100	100	65	80	17	38,0	M160 x 3

Dimensions

Type	H Ø	I	K Ø	L	M	P	R
	mm		mm				
TCRB 13	XXX	M68 x 3	74	25	XXX	5	3
TCRB 25	XXX	M90 x 3	100	30	XXX	6	3
TCRB 40	105.5	TR120 x 6	135	25	40	8	3
TCRB 63	130.5	TR145 x 6	160	25	45	8	6
TCRB 100	160.5	TR180 x 10	200	30	45	8	6



BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

BAHCO

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.