

ACCESSORIES COMPRESSED AIR

BAHCO
DORTMUND




**BLOW GUN
ACCESSORIES**


BAHCO

Nozzles for Blow guns Type 11-208- ...

Rubber nozzle	Part-No.	Diameter Ø mm
Fits directly onto the tube. For use on sensitive surfaces. Suitable for the leak test. The nozzle is available in three different sizes, either individually or as a set.	11 208 9956	14
	Suitable for the leak test. The nozzle is available in three different sizes, either individually or as a set.	25
		35
	11 208 9960	3-part-set

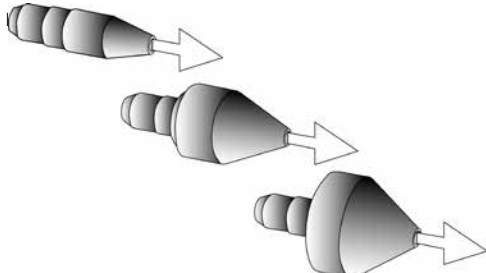


Venturi-nozzle	Part-No.
Fits directly onto the tube. The air flow is increased by aspirating. Fits directly onto the tube. The air flow is increased by aspirating the ambient air to 100%. Suitable to blow away light chips. In blocking the nozzle, the air is blown laterally, reducing the outlet maximum outlet pressure to less than 2 bar is reduced.	11 208 9963



OK


Bypass-nozzle	Part-No.
Fits directly onto the tube. When back pressure, the pressure is released through the side outlets (or circulated), whereby the maximum outlet pressure to less than 2 bar is reduced.	11 208 9961



OK

Other accessories for blow guns type 11-208- ...

Shield-nozzle	Part-No.
Fits directly onto the tube. Creates a protective air jacket, suitable for the removal of lightweight wood shavings or liquids. When back pressure, the air is let out from the side and reduces the outlet pressure to less than 2 bar.	11 208 9954



OK


| Shilde | Part-No. |
| Fits directly onto the tube. Protects the operator from flying chips. For mounting at any point on the tube. Nitrile bushing in favor of a simple assembly. Diameter of the transparent shield: 100 mm. | 11 208 9955 |


OK

BLOW GUN ACCESSORIES

BAHCO
DORTMUND

Tube for Blow guns for types 11-208- ...

Damper Fits directly onto the tube. Reduces noise in an effective way, when a low noise level is required. Noise level: 82 dB (A)	Part-No. 11 208 9962   
Tube 90 mm Fits directly onto the thread of the blowgun. Air flow: regular – 500 l/min. Star-Tip* – 190 l/min.	Part-No. regular 11 208 0215 Star-Tip* 11 208 3215   
Tube controller 90 mm Fits directly onto the threads of blowgun. Reduces the outlet pressure to a safe level if a blockage inside the tube, or if a counter pressure should occur.	Part-No. 11 208 0216  
Extension tube 300/500 mm Fits directly onto the threads of blowgun. Provides better access to hard to reach places. Air flow: 380 l / min.	Part-No. 300 mm 11 208 0219 500 mm 11 208 0220 
Star-Tip-Extension tube 300/500 mm Fits directly onto the threads of blowgun. Provides better access to hard to reach places; Moreover, equipped with damping and OSHA-compliant features.	Artikel-Nr. 300 mm 11 208 3219 500 mm 11 208 3220   
Flexible Extension tube 400 mm Fits directly onto the threads of blowgun. Can be set weighed and for special applications in hard-to-reach areas. Flexible 6 mm - coated copper tube. Air flow: 120 l / min.	Part-no. 11 208 0222  



All products marked with an „OK“ icon in accordance with the OSHA standard STD1-13.1: „... when a back pressure occurrence of the static pressure at the main port shall not exceed 2 bar.“



All products marked with an „ear“ symbol have a sound level below 85 dB (A) and in accordance with the EU Machinery Directive § 1.5.8 with regard to noise reduction requirements.

BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0

Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

Nozzles for Blow guns type APN-...

Description	Material	Type	Part-No.
❶ Standard nozzle	Steel, galvanized	P1	61 9012 11
❷ Noise damped nozzle	Steel, galvanized	GD1	61 9012 12
❸ Safety nozzle	Steel, galvanized	SD1	61 9012 13
❹ Noise damped safety nozzle	Steel, galvanized	GSD1	61 9012 14
❺ Injector nozzle	Steel, galvanized	J1	61 9012 15
Extension nozzle 150 mm	Nickel-plated brass	VD1	61 9012 16

