

HOLE PUNCH MACHINES

BAHCO
DORTMUND



HOLE PUNCH MACHINE SERIES H9

Air hydraulic punch tool for stainless steel up to 0.8 mm and aluminium up to 1.8 mm.

BAHCO



BAHCO GmbH & Co.KG

Martener Hellweg 60
DE- 44379 Dortmund

Phone

+49 231/91 72 11-0


Fax

+49 231/91 72 11-22

www.bahco.de

info@bahco.de

H9 Tool head

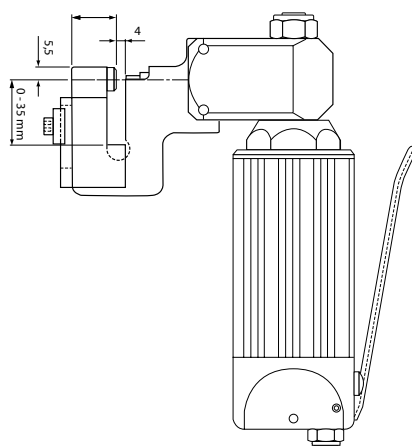

Dimensions

90°- version Description	Punching force* kN	Weight kgs	Length mm	Cylinder Ø mm	Article-No.
H9/d-220	4.4	1.0	179	52	8622-(Ø punch)

Capacity* (Thickness mm)

Material	Aluminium	Steel (1311)	Stainless steel
Punch Ø 3.25 mm	1.8	1.2	0.8
Punch Ø 4.0 mm	1.4	1.0	0.6
Punch Ø 4.1 mm	1.4	1.0	0.6
Punch Ø 4.9 mm	1.2	0.8	0.5
Punch Ø 5.0 mm	1.2	0.8	0.5

Vibration level: < 2.5 m/s²
Noise level: 63 dB(A)



* Pressure at 6 bar

The standard version of the H9 punching machine is available with a complete punching kit according to the table above. In special designs, punches are available at intervals of 0.1 mm. The punch and die can be easily exchanged.

Example: H9 / d-220 hole punching machine and the diameter of the punch 4 mm has the order title H9 / 4-220

Grip depth

The maximum depth of the gripping tool between materials science and center hole is 35 mm.

All information subject to change without further notice.
No responsibility is taken for the correctness of the named specifications.